



ON

OFF

POWER

INPUT POWER




INPUT POWER  
100-120V~50/60Hz  
310W

**WARNING:**  
FENDER® AMPLIFIER SYSTEMS ARE CAPABLE OF PRODUCING VERY HIGH SOUND PRESSURE LEVELS WHICH MAY CAUSE TEMPORARY OR PERMANENT HEARING DAMAGE. USE CARE WHEN SETTING AND ADJUSTING VOLUME LEVELS DURING USE.

**CAUTION:**  
TO REDUCE THE RISK OF FIRE, REPLACE FUSE WITH SAME TYPE AND RATING  
**ATTENTION:**  
UTILISER UN FUSIBLE DERECHANGE DE MEME TYPE ET CALIBRE

THIS DEVICE COMPLIES WITH PART 15 OF FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS:  
(1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND  
(2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIREED OPERATION.

THIS PRODUCT IS COVERED BY THE FOLLOWING PATENT:  
PATENT #6,222,110



MODEL

**Champion™ 100**

**CAUTION:** CHASSIS SURFACE HOT  
**WARNING:** TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS EQUIPMENT TO RAIN OR MOISTURE  
**AVERTISSEMENT:** RISQUE DE CHOC ELECTRIQUE ! NE PAS OUVRIR !  
**ATTENTION:** SUPERFICIE DE CHASSIS CHAUDE


**WARNING:** MAINTAIN 6" CLEARANCE FOR VENTILATION.

A PRODUCT OF:  
**FENDER MUSICAL INSTRUMENTS CORP.,**  
**CORONA, CA U.S.A.**  
**MADE IN CHINA**  
*Fender*  
IS A REGISTERED TRADEMARK OF FENDER MUSICAL INSTRUMENTS CORP.

SERIAL NUMBER



**TYPE: PR 4223**



POWER  
ON  
OFF

THIS DEVICE COMPLIES WITH PART 15 OF FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS:  
(1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND  
(2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRE

Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan  
Apparatets stikprop skal tilsluttet en stikkontakt med jord, som giver forbindelse til stikproppens jord.  
Apparatet må tilkoples jordnet stikkontakt  
Apparaten skall anslutas till jordat uttag

CAUTION: CHASSIS SURFACE HOT  
WARNING: TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS EQUIPMENT TO RAIN OR MOISTURE  
ATTENTION: RISQUE DE CHOC ELECTRIQUE - NE PAS OUVRIR  
ATTENTION: SUPERFICIE DE CHASSIS CHAUDE

MODEL

Rumble<sup>TM</sup>  
800

A PRODUCT OF:  
FENDER MUSICAL INSTRUMENTS CORP.,  
CORONA, CA U.S.A.  
DESIGNED AND ENGINEERED IN THE U.S.A.

CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE BACK COVER.NO USER SERVICEABLE PARTS INSIDE, REFER SERVICING TO QUALIFIED PERSONNEL ONLY.

WARNING:  
MAINTAIN 6" CLEARANCE FOR VENTILATION.

警告：接地されている接続を提供してください。  
WARNING:  
PROVIDE AN EARTHING CONNECTION.

INPUT POWER



100V-240V ~ 50/60Hz  
1500W



フェンダー・ミュージック(株)



EXT. SPKR

(USE 8Ω IF NO EXT. SPKR)



SET SWITCH TO MATCH EXT. SPKR IMPEDANCE

HORN

ON

OFF

EFFECTS  
SEND RETURN



AUX IN



PHONES



FTSW



LINE OUT



PRE



LIFT



POST





GND



TYPE: PR 6106  
SERIAL NUMBER



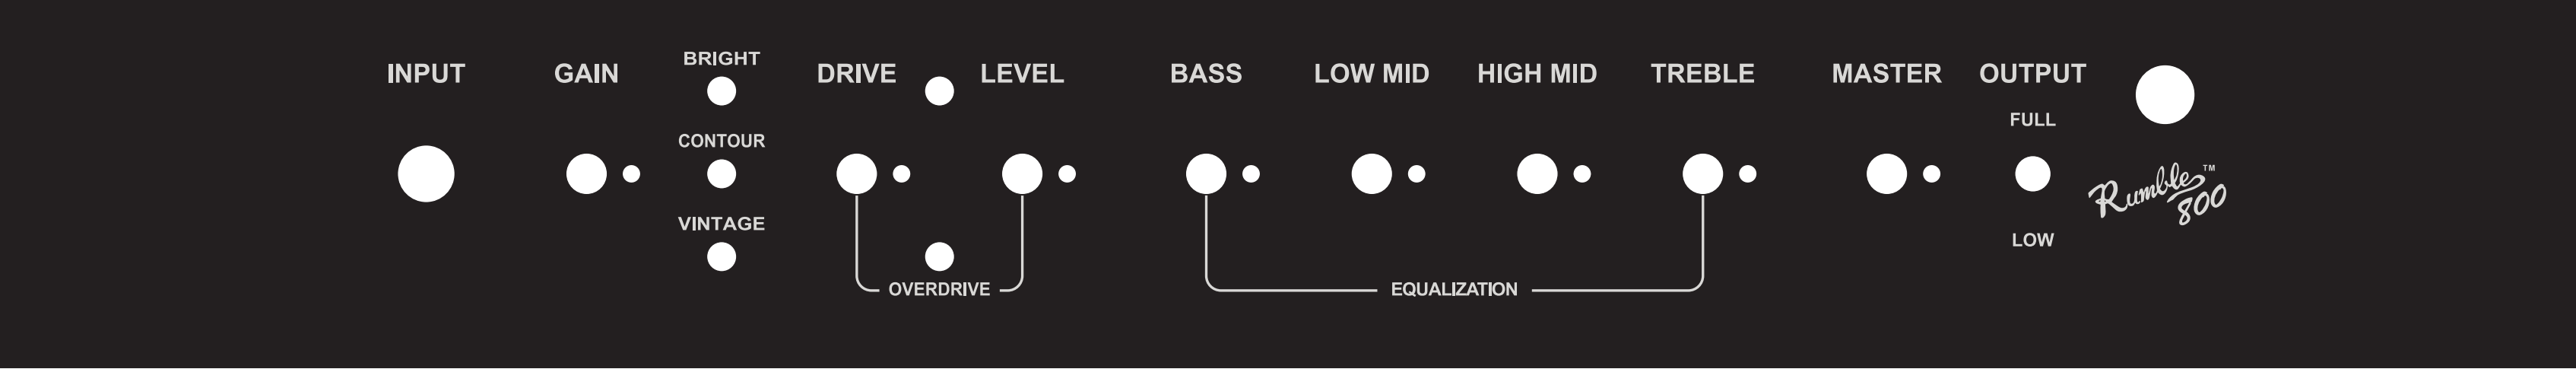

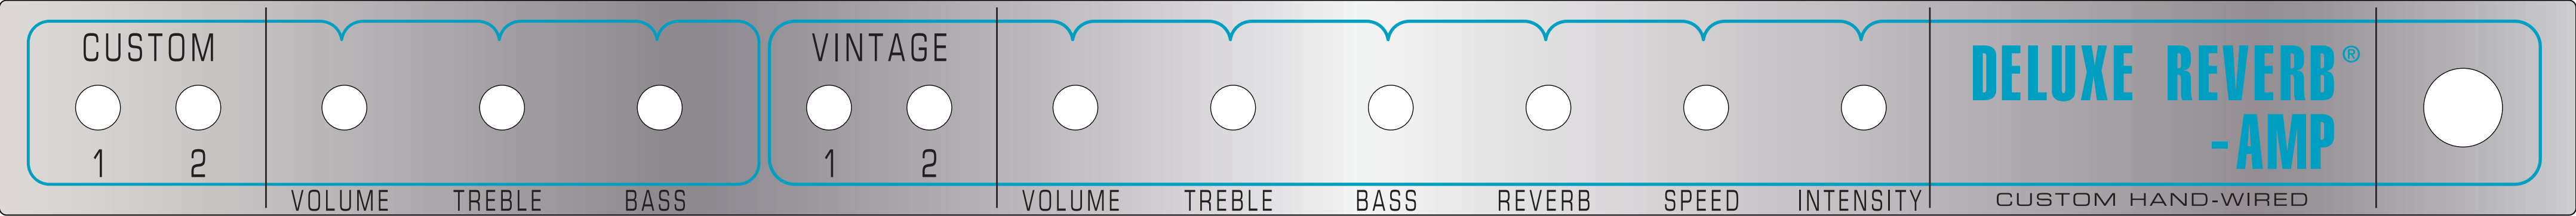

**PASSPORT® FLEX**  
FENDER MUSICAL INSTRUMENTS



**PAIR**



**AUX  
INPUT**

**CH 1**



**EQ CONTOUR**


**CH 2**




**EQ CONTOUR**



**WIRELESS MIC**




**INPUT**



**INPUT**



**BATTERY**



**POWER**



**INPUT POWER 75W**  
**100V-240V~50/60Hz**

WARNING: MAINTAIN 6" CLEARANCE  
FOR VENTILATION.



Laitte on liitettävä suojakoskettimilla varustettuun pistorasiaan  
Apparatets stikprop skal tilsluttes en stikkontakt  
med jord, som giver forbindelse til stikproppens jord.  
Apparatet må tilkoples jordet stikkontakt  
Apparaten skall anslutas till jordat uttag



**CAUTION:** CHASSIS SURFACE HOT  
**WARNING:** TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS EQUIPMENT TO RAIN OR MOISTURE  
**AVERTISSEMENT:** RISQUE DE CHOC ELECTRIQUE - NE PAS OUVRIR  
**ATTENTION:** SUPERFICIE DE CHASSIS CHAUDE

**WARNING:**  
FENDER AMPLIFIER SYSTEMS ARE CAPABLE OF PRODUCING VERY HIGH SOUND PRESSURE LEVELS WHICH MAY CAUSE TEMPORARY OR PERMANENT HEARING DAMAGE. USE CARE WHEN SETTING AND ADJUSTING VOLUME LEVELS DURING USE.

**CAUTION:**  
TO REDUCE THE RISK OF FIRE, REPLACE FUSE WITH SAME TYPE AND RATING




**ATTENTION:**  
UTILISER UN FUSIBLE DE RECHANGE DE MEME TYPE ET CALIBRE



**PASSPORT® CONFERENCE  
S E R I E S 2**

Model:  
**PASSPORT® CONFERENCE SERIES 2**  
FCC ID: XQWXXXXXXX  
IC: 8690AXXXXXXX  
Homologación IFT:  
XXXXXXXXXX-XXXX

100-120V~ 50/60Hz 220-240V~ 50/60Hz

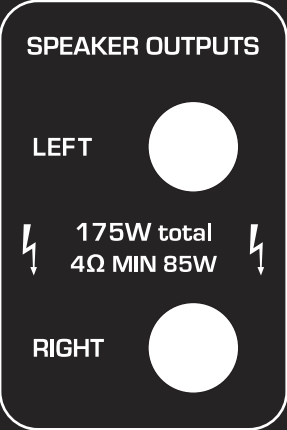

Use only with supplied 4 ohm speakers

PRODUCED BY:  
**FENDER MUSICAL INSTRUMENTS CORP.,  
311 CESSNA CIRCLE CORONA, CA 92880 U.S.A.  
MADE IN CHINA  
DESIGNED AND ENGINEERED IN U.S.A.**

**WARNING:** MAINTAIN 6" CLEARANCE FOR VENTILATION.

**TYPE: PR 844  
SERIAL NUMBER**



ON OFF

**FUSE  
T4A H  
250V**

**INPUT POWER  
225W**

THIS DEVICE COMPLIES WITH PART 15 OF FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRED OPERATION.



ON



OFF



MODEL

**Fender**  
**ACOUSTIC SFX II**



EXCLUSIVE "SFX TECHNOLOGY" FEATURE  
PATENT NUMBER: 6,219,426



MANUFACTURED UNDER LICENSE FROM  
ASPEN PITTMAN AND DREW DANIELS OF CENTER POINT STEREO

FENDER and FENDER in script are trademarks of FMIC.  
Registered in the U.S. and foreign countries. All rights reserved.

100V-240V ~ 50/60Hz

INPUT POWER : 300W

SERIAL NUMBER

THIS PRODUCT IS COVERED BY THE FOLLOWING PATENT:  
PATENT #6,222,110

A PRODUCT OF:  
**FENDER MUSICAL INSTRUMENTS CORP.**  
311 CESSNA CIRCLE CORONA, CA 92880 U.S.A.  
MADE IN CHINA  
DESIGNED AND ENGINEERED IN THE U.S.A.


TYPE: PR 5725

WARNING:

FENDER AMPLIFIER SYSTEMS ARE CAPABLE OF PRODUCING VERY  
HIGH SOUND PRESSURE LEVELS WHICH MAY CAUSE TEMPORARY  
OR PERMANENT HEARING DAMAGE. USE CARE WHEN SETTING AND  
ADJUSTING VOLUME LEVELS DURING USE.

WARNING:

MAINTAIN 6" CLEARANCE  
FOR VENTILATION.



CAUTION: CHASSIS SURFACE HOT

WARNING: TO REDUCE THE RISK OF  
FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE  
THIS EQUIPMENT TO RAIN OR MOISTURE

AVERTISSEMENT: RISQUE DE  
CHOC ELECTRIQUE ! NE PAS OUVRIR !

ATTENTION: SUPERFICIE DE CHASSIS  
CHAUDE



THIS DEVICE COMPLIES WITH PART 15 OF FCC RULES. OPERATION IS SUBJECT  
TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL  
INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED,  
INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRE OPERATION.

警告：接地されている接続を提供してください。

WARNING:

PROVIDE AN EARTHING CONNECTION.



フェンダー・  
ミュージック(株)



Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan  
Apparatets stikprop skal tilsluttes en stikkontakt  
med jord, som giver forbindelse til stikproppens jord.  
Apparatet må tilkoples jordet stikkontakt  
Apparaten skall anslutas till jordat uttag

CAUTION:



TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE  
BACK COVER. NO USER SERVICEABLE PARTS INSIDE, REFER  
SERVICING TO QUALIFIED PERSONNEL ONLY.



PHONES


LINE OUT

AUX IN

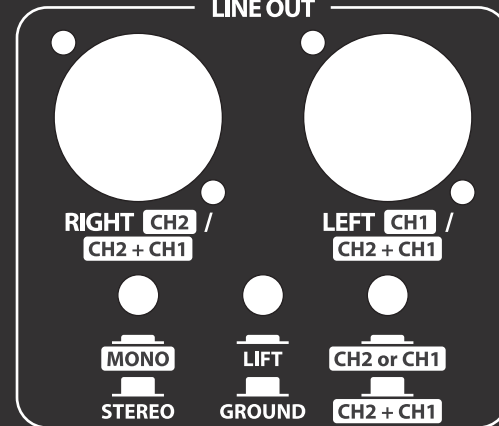

CONTAINS FCC ID: A8TBM20SPKXYNBZ  
IC: 12246A-BM20SPKS1

ACOUSTIC SFX II



CHANNEL 1



PHASE



VOLUME



LOW



FX LEVEL



MID



FX SELECT



HIGH

- ROOM
- HALL
- ECHO
- DELAY
- CHORUS
- VIBRATONE
- DLY + CHO
- DLY + REV



POWER



PAIR



STEREO SFX

- ROOM
- HALL
- ECHO
- DELAY
- CHORUS
- VIBRATONE
- DLY + CHO
- DLY + REV

LOOPER



REC/DUB



PLAY/STOP



UNDO



FX SELECT



LOW



FX LEVEL



MID



VOLUME



HIGH



CHANNEL 2




PHASE






POWER  
ON OFF



INPUT POWER



100V-240V ~ 50/60Hz  
118W

**CAUTION:** CHASSIS SURFACE HOT  
**WARNING:** TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS EQUIPMENT TO RAIN OR MOISTURE  
**ATTENTION:** RISQUE DE CHOC ELECTRIQUE - NE PAS OUVRIR  
**ATTENTION:** SUPERFICIE DE CHASSIS CHAUDE  
**WARNING:** MAINTAIN 6" CLEARANCE FOR VENTILATION.

**CAUTION:** TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE BACK COVER. NO USER SERVICEABLE PARTS INSIDE, REFER SERVICING TO QUALIFIED PERSONNEL ONLY.

Apparatets stikprop skal tilsluttes en stikkontakt med jord, som giver forbindelse til stikproppens jord. Laite on liitettävä suojakoskettimillä varustettuun pistorasiaan. Apparatet må tilkoples jordet stikkontakt. Apparatet skall anslutas till jordat uttag.

FOOTSWITCH



MODEL  
**MUSTANG™ GTX50**  
PRODUCED BY:  
**FENDER MUSICAL INSTRUMENTS CORP.,**  
**311 CESSNA CIRCLE CORONA, CA 92880 U.S.A.**  
**MADE IN CHINA**  
**DESIGNED AND ENGINEERED IN U.S.A.**

CONTAINS FCC ID: XQW-FMAPR5133  
IC: 8690A-FMAPR5133

THIS PRODUCT IS COVERED BY THE FOLLOWING PATENT:  
PATENT # 6,222,110



R LINE OUT L



R FX SEND L




R FX RETURN L



SERIAL  
NUMBER

TYPE PR: 5133



INPUT POWER



INPUT POWER  
120V~60Hz  
290W

FUSE  
F315AL  
250V

MODEL

ACB 50

A PRODUCT OF:  
FENDER MUSICAL INSTRUMENTS CORP.,  
CORONA, CA U.S.A.  
MADE IN MEXICO

*Handwritten signature*

BALANCED DIRECT OUT  
GROUND LIFT



-20dBu MAX

BALANCED LINE OUT



+4dBu MAX

EXT. SPEAKER  
8Ω MINIMUM  
50W



SEE MANUAL



CAUTION: CHASSIS SURFACE HOT

WARNING: TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS EQUIPMENT TO RAIN OR MOISTURE  
AVERTISSEMENT: RISQUE DE CHOC ELECTRIQUE  
- NE PAS OUVRIR

ATTENTION: SUPERFICIE DE CHASSIS CHAUDE

CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE BACK COVER, NO USER SERVICEABLE PARTS INSIDE, REFER SERVICING TO QUALIFIED PERSONNEL ONLY.

WARNING: FENDER AMPLIFIER SYSTEMS ARE CAPABLE OF PRODUCING VERY HIGH SOUND PRESSURE LEVELS WHICH MAY CAUSE TEMPORARY OR PERMANENT HEARING DAMAGE, USE CARE WHEN SETTING AND ADJUSTING VOLUME LEVELS DURING USE.

CAUTION: TO REDUCE THE RISK OF FIRE, REPLACE FUSE WITH SAME TYPE AND RATING

ATTENTION: UTILISER UN FUSIBLE DE RECHANGE DE MEME TYPE ET CALIBRE

WARNING: MAINTAIN 6" CLEARANCE FOR VENTILATION.



CAUTION: HOT  
SURFACES BELOW  
ATTENTION:  
SURFACE  
CHAUDE CI-DESSOUS



TYPE: PR 5690  
SERIAL NUMBER

